



Valena™
2 P+E socket outlets - IP 44
German standard

Cat. No(s): 7 741 20 - 7 742 20/60

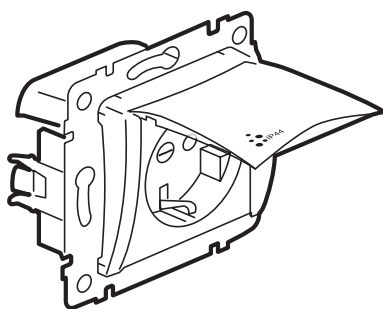

7 741 20 - 7 742 20



7 742 60


1. USE

Waterproof socket outlets, German standard.
 Mechanisms supplied with:
 - Support
 - Cover plate
 To be equipped with plate.

2. RANGE

Description	Ivory	White
2 P+E socket with shutters and flap cover	7 741 20	7 742 20
2 P+E socket key protected with shutters and flap cover	-	7 742 60

3. OVERALL DIMENSIONS (mm)

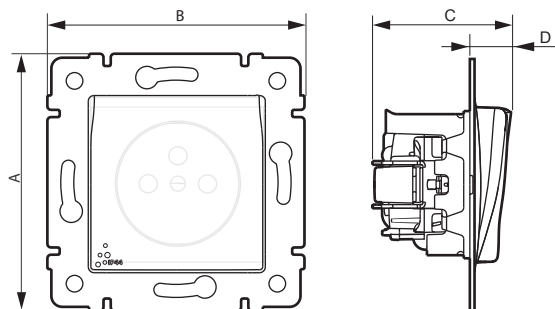

References	A	B	C	D
7 741 20 - 7 742 20	71	71	51	20
7 742 60	71	71	51	20

4. CONNECTION

Screw terminals
 Capacity: 2 x 2.5 mm²
 Stripping length: 10 mm
 Compatible flexible or rigid cables.

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Protection against solid bodies and liquids: IP 44
 Protection against impact: IK 04

■ **5.2 Material characteristics**

Colour: - White RAL 9003 - Ivory RAL 1013
 Material: - Membrane: PP
 - Cover: PC (transparent)
 - Cover plate (of the socket outlet): PC
 - Halogen free
 - UV resistant

Support: Zinc plated steel

Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place
- + 650° C / 30 s for other parts made of insulating materials.

■ **5.3 Electrical characteristics**

Voltage: 250 V~
 Current: 16 A
 Frequency: 50/60 Hz

■ **5.4 Climatic characteristics**

Storage and usage temperature: - 5° C to + 40° C

6. MAINTENANCE

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistance to the following cleaning substances:

- Hexane
- Methylated spirit
- Soapy water
- Diluted ammonia
- Diluted pure bleach 10%
- Glass cleaning product (Ethanol 1%, Butylglycol 6%)

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. ACCESSORIES

Key Cat. No 7 759 99

8. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 Refer to e. catalogue.